

12/23/97  
JC55 U.S. PTO

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box →

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1-5703 Total Pages

First Named Inventor or Application Identifier

Gerald L. Myers

Express Mail Label No. EM037042162US

### APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 14] (preferred arrangement set forth below)	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
<ul style="list-style-type: none"> <li>- Descriptive title of the Invention</li> <li>- Cross References to Related Applications</li> <li>- Statement Regarding Fed sponsored R &amp; D</li> <li>- Reference to Microfiche Appendix</li> <li>- Background of the Invention</li> <li>- Brief Summary of the Invention</li> <li>- Brief Description of the Drawings (if filed)</li> <li>- Detailed Description</li> <li>- Claim(s)</li> <li>- Abstract of the Disclosure</li> </ul>	
3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 4]	a. <input type="checkbox"/> Computer Readable Copy
4. Oath or Declaration [Total Pages 2]	b. <input type="checkbox"/> Paper Copy (identical to computer copy)
<ul style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</li> <li>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) (Note Box 5 below)</li> <li>i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</li> </ul>	
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	
6. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)	
a. <input type="checkbox"/> Computer Readable Copy	
b. <input type="checkbox"/> Paper Copy (identical to computer copy)	
c. <input type="checkbox"/> Statement verifying identity of above copies	

### ACCOMPANYING APPLICATION PARTS

- 8.  Assignment Papers (cover sheet & document(s))
- 9.  37 CFR 3.73(b) Statement (when there is an assignee)  Power of Attorney
- 10.  English Translation Document (if applicable)
- 11.  Information Disclosure Statement (IDS)/PTO-1449  Copies of IDS Citations
- 12.  Preliminary Amendment
- 13.  Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
- 14.  Small Entity Statement(s)  Statement filed in prior application, Status still proper and desired
- 15.  Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
- 16.  Other: .....
- .....
- .....
- .....

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

Continuation  Divisional  Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

### 18. CORRESPONDENCE ADDRESS


Customer Number or Bar Code Label  or  Correspondence address below  
(Insert Customer No. or Attach bar code label here)

NAME	Richard S. MacMillan				
	MacMillan, Sobanski & Todd				
ADDRESS	One Maritime Plaza, Fourth Floor				
	720 Water Street				
CITY	Toledo	STATE	Ohio	ZIP CODE	43604
COUNTRY	U.S.A.	TELEPHONE	419-255-5900	FAX	419-255-9639

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

<b>FEE TRANSMITTAL</b>		<i>Complete if Known</i>	
		Application Number	
		Filing Date	
		First Named Inventor	Gerald L. Myers
		Group Art Unit	
		Examiner Name	
<b>TOTAL AMOUNT OF PAYMENT</b>		(\$)	
830.00		Attorney Docket Number	
		1-5703	

<b>METHOD OF PAYMENT</b> (check one)		<b>FEE CALCULATION</b> (continued)																																																																																																																																																										
<p>1. <input type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:</p> <p>Deposit Account Number</p> <p>Deposit Account Name</p> <p><input type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17    <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance</p>		<p><b>3. ADDITIONAL FEES</b></p> <table border="1"> <thead> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th colspan="2">Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>105</td><td>130</td><td>205</td><td>65</td><td>Surcharge - late filing fee or oath</td></tr> <tr><td>127</td><td>50</td><td>227</td><td>25</td><td>Surcharge - late provisional filing fee or cover sheet.</td></tr> <tr><td>139</td><td>130</td><td>139</td><td>130</td><td>Non-English specification</td></tr> <tr><td>147</td><td>2,520</td><td>147</td><td>2,520</td><td>For filing a request for reexamination</td></tr> <tr><td>112</td><td>920*</td><td>112</td><td>920*</td><td>Requesting publication of SIR prior to Examiner action</td></tr> <tr><td>113</td><td>1,840*</td><td>113</td><td>1,840*</td><td>Requesting publication of SIR after Examiner action</td></tr> <tr><td>115</td><td>110</td><td>215</td><td>55</td><td>Extension for reply within first month</td></tr> <tr><td>116</td><td>400</td><td>216</td><td>200</td><td>Extension for reply within second month</td></tr> <tr><td>117</td><td>950</td><td>217</td><td>475</td><td>Extension for reply within third month</td></tr> <tr><td>118</td><td>1,510</td><td>218</td><td>755</td><td>Extension for reply within fourth month</td></tr> <tr><td>128</td><td>2,060</td><td>228</td><td>1,030</td><td>Extension for reply within fifth month</td></tr> <tr><td>119</td><td>310</td><td>219</td><td>155</td><td>Notice of Appeal</td></tr> <tr><td>120</td><td>310</td><td>220</td><td>155</td><td>Filing a brief in support of an appeal</td></tr> <tr><td>121</td><td>270</td><td>221</td><td>135</td><td>Request for oral hearing</td></tr> <tr><td>138</td><td>1,510</td><td>138</td><td>1,510</td><td>Petition to institute a public use proceeding</td></tr> <tr><td>140</td><td>110</td><td>240</td><td>55</td><td>Petition to revive - unavoidable</td></tr> <tr><td>141</td><td>1,320</td><td>241</td><td>660</td><td>Petition to revive - unintentional</td></tr> <tr><td>142</td><td>1,320</td><td>242</td><td>660</td><td>Utility issue fee (or reissue)</td></tr> <tr><td>143</td><td>450</td><td>243</td><td>225</td><td>Design issue fee</td></tr> <tr><td>144</td><td>670</td><td>244</td><td>335</td><td>Plant issue fee</td></tr> <tr><td>122</td><td>130</td><td>122</td><td>130</td><td>Petitions to the Commissioner</td></tr> <tr><td>123</td><td>50</td><td>123</td><td>50</td><td>Petitions related to provisional applications</td></tr> <tr><td>126</td><td>240</td><td>126</td><td>240</td><td>Submission of Information Disclosure Stmt</td></tr> <tr><td>581</td><td>40</td><td>581</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td></tr> <tr><td>146</td><td>790</td><td>246</td><td>395</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td></tr> <tr><td>149</td><td>790</td><td>249</td><td>395</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td></tr> <tr><td colspan="4">Other fee (specify) _____</td><td>40.00</td></tr> <tr><td colspan="4">Other fee (specify) _____</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;">SUBTOTAL (1) (\$)</td> <td colspan="2" style="text-align: right;">SUBTOTAL (3) (\$)</td> </tr> <tr> <td colspan="2" style="text-align: right;">790.00</td> <td colspan="2" style="text-align: right;">0.00</td> </tr> </tbody> </table>		Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description		Fee Paid	105	130	205	65	Surcharge - late filing fee or oath	127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	139	130	139	130	Non-English specification	147	2,520	147	2,520	For filing a request for reexamination	112	920*	112	920*	Requesting publication of SIR prior to Examiner action	113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	115	110	215	55	Extension for reply within first month	116	400	216	200	Extension for reply within second month	117	950	217	475	Extension for reply within third month	118	1,510	218	755	Extension for reply within fourth month	128	2,060	228	1,030	Extension for reply within fifth month	119	310	219	155	Notice of Appeal	120	310	220	155	Filing a brief in support of an appeal	121	270	221	135	Request for oral hearing	138	1,510	138	1,510	Petition to institute a public use proceeding	140	110	240	55	Petition to revive - unavoidable	141	1,320	241	660	Petition to revive - unintentional	142	1,320	242	660	Utility issue fee (or reissue)	143	450	243	225	Design issue fee	144	670	244	335	Plant issue fee	122	130	122	130	Petitions to the Commissioner	123	50	123	50	Petitions related to provisional applications	126	240	126	240	Submission of Information Disclosure Stmt	581	40	581	40	Recording each patent assignment per property (times number of properties)	146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))	Other fee (specify) _____				40.00	Other fee (specify) _____					SUBTOTAL (1) (\$)		SUBTOTAL (3) (\$)		790.00		0.00	
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description		Fee Paid																																																																																																																																																								
105	130	205	65	Surcharge - late filing fee or oath																																																																																																																																																								
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.																																																																																																																																																								
139	130	139	130	Non-English specification																																																																																																																																																								
147	2,520	147	2,520	For filing a request for reexamination																																																																																																																																																								
112	920*	112	920*	Requesting publication of SIR prior to Examiner action																																																																																																																																																								
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																								
115	110	215	55	Extension for reply within first month																																																																																																																																																								
116	400	216	200	Extension for reply within second month																																																																																																																																																								
117	950	217	475	Extension for reply within third month																																																																																																																																																								
118	1,510	218	755	Extension for reply within fourth month																																																																																																																																																								
128	2,060	228	1,030	Extension for reply within fifth month																																																																																																																																																								
119	310	219	155	Notice of Appeal																																																																																																																																																								
120	310	220	155	Filing a brief in support of an appeal																																																																																																																																																								
121	270	221	135	Request for oral hearing																																																																																																																																																								
138	1,510	138	1,510	Petition to institute a public use proceeding																																																																																																																																																								
140	110	240	55	Petition to revive - unavoidable																																																																																																																																																								
141	1,320	241	660	Petition to revive - unintentional																																																																																																																																																								
142	1,320	242	660	Utility issue fee (or reissue)																																																																																																																																																								
143	450	243	225	Design issue fee																																																																																																																																																								
144	670	244	335	Plant issue fee																																																																																																																																																								
122	130	122	130	Petitions to the Commissioner																																																																																																																																																								
123	50	123	50	Petitions related to provisional applications																																																																																																																																																								
126	240	126	240	Submission of Information Disclosure Stmt																																																																																																																																																								
581	40	581	40	Recording each patent assignment per property (times number of properties)																																																																																																																																																								
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))																																																																																																																																																								
149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))																																																																																																																																																								
Other fee (specify) _____				40.00																																																																																																																																																								
Other fee (specify) _____																																																																																																																																																												
SUBTOTAL (1) (\$)		SUBTOTAL (3) (\$)																																																																																																																																																										
790.00		0.00																																																																																																																																																										
<p>2. <input checked="" type="checkbox"/> Payment Enclosed:</p> <p><input checked="" type="checkbox"/> Check    <input type="checkbox"/> Money Order    <input type="checkbox"/> Other</p>																																																																																																																																																												
<b>FEE CALCULATION</b>																																																																																																																																																												
<p><b>1. FILING FEE</b></p> <table border="1"> <thead> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th colspan="2">Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>101</td><td>790</td><td>201</td><td>395</td><td>Utility filing fee</td></tr> <tr><td>106</td><td>330</td><td>206</td><td>165</td><td>Design filing fee</td></tr> <tr><td>107</td><td>540</td><td>207</td><td>270</td><td>Plant filing fee</td></tr> <tr><td>108</td><td>790</td><td>208</td><td>395</td><td>Reissue filing fee</td></tr> <tr><td>114</td><td>150</td><td>214</td><td>75</td><td>Provisional filing fee</td></tr> <tr> <td colspan="2"></td> <td colspan="2" style="text-align: right;">SUBTOTAL (1) (\$)</td> <td>790.00</td> </tr> </tbody> </table>				Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description		Fee Paid	101	790	201	395	Utility filing fee	106	330	206	165	Design filing fee	107	540	207	270	Plant filing fee	108	790	208	395	Reissue filing fee	114	150	214	75	Provisional filing fee			SUBTOTAL (1) (\$)		790.00																																																																																																																						
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description		Fee Paid																																																																																																																																																								
101	790	201	395	Utility filing fee																																																																																																																																																								
106	330	206	165	Design filing fee																																																																																																																																																								
107	540	207	270	Plant filing fee																																																																																																																																																								
108	790	208	395	Reissue filing fee																																																																																																																																																								
114	150	214	75	Provisional filing fee																																																																																																																																																								
		SUBTOTAL (1) (\$)		790.00																																																																																																																																																								
<p><b>2. CLAIMS</b></p> <table border="1"> <thead> <tr> <th>Total Claims</th> <th>Extra</th> <th>Fee from below</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>13</td><td>-20 =</td><td>0</td><td>0.00</td></tr> <tr><td>Independent Claims</td><td>1</td><td>- 3 =</td><td>0.00</td></tr> <tr><td>Multiple Dependent Claims</td><td></td><td>0</td><td>0.00</td></tr> </tbody> </table>				Total Claims	Extra	Fee from below	Fee Paid	13	-20 =	0	0.00	Independent Claims	1	- 3 =	0.00	Multiple Dependent Claims		0	0.00																																																																																																																																									
Total Claims	Extra	Fee from below	Fee Paid																																																																																																																																																									
13	-20 =	0	0.00																																																																																																																																																									
Independent Claims	1	- 3 =	0.00																																																																																																																																																									
Multiple Dependent Claims		0	0.00																																																																																																																																																									
<table border="1"> <thead> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th colspan="2">Fee Description</th> </tr> </thead> <tbody> <tr><td>103</td><td>22</td><td>203</td><td>11</td><td>Claims in excess of 20</td></tr> <tr><td>102</td><td>82</td><td>202</td><td>41</td><td>Independent claims in excess of 3</td></tr> <tr><td>104</td><td>270</td><td>204</td><td>135</td><td>Multiple dependent claim</td></tr> <tr><td>109</td><td>82</td><td>209</td><td>41</td><td>Reissue independent claims over original patent</td></tr> <tr><td>110</td><td>22</td><td>210</td><td>11</td><td>Reissue claims in excess of 20 and over original patent</td></tr> <tr> <td colspan="2"></td> <td colspan="2" style="text-align: right;">SUBTOTAL (2) (\$)</td> <td>0.00</td> </tr> </tbody> </table>				Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description		103	22	203	11	Claims in excess of 20	102	82	202	41	Independent claims in excess of 3	104	270	204	135	Multiple dependent claim	109	82	209	41	Reissue independent claims over original patent	110	22	210	11	Reissue claims in excess of 20 and over original patent			SUBTOTAL (2) (\$)		0.00																																																																																																																							
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description																																																																																																																																																										
103	22	203	11	Claims in excess of 20																																																																																																																																																								
102	82	202	41	Independent claims in excess of 3																																																																																																																																																								
104	270	204	135	Multiple dependent claim																																																																																																																																																								
109	82	209	41	Reissue independent claims over original patent																																																																																																																																																								
110	22	210	11	Reissue claims in excess of 20 and over original patent																																																																																																																																																								
		SUBTOTAL (2) (\$)		0.00																																																																																																																																																								
* Reduced by Basic Filing Fee Paid																																																																																																																																																												

<b>SUBMITTED BY</b>		Complete (if applicable)	
Typed or Printed Name	Richard S. MacMillan		Reg. Number
Signature			Deposit Account User ID
Date	12/23/97		

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**TITLE: METHOD FOR BALANCING  
A VEHICLE DRIVESHAFT**

INVENTOR(S): GERALD L. MYERS

ATTORNEY Richard S. MacMillan  
MacMillan, Sobanski & Todd  
One Maritime Plaza, Fourth Floor  
720 Water Street  
Toledo, Ohio 43604

ATTORNEY CASE NUMBER 1-5703

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated below and is addressed to the Assistant Commissioner For Patents, Washington, D.C. 20231.

Betty J. Borger  
(signature)  
Date of signature and deposit - December 23, 1997

“Express Mail” Mailing Label Number EM 037042162 US

TITLE

METHOD FOR BALANCING A VEHICLE DRIVESHAFT

5

BACKGROUND OF THE INVENTION

This invention relates in general to drive train assemblies for transferring rotational power from a source of rotational power to a rotatably driven device. In particular, this invention relates to an improved method for rotatably balancing a driveshaft adapted for use in a vehicular drive train assembly for transferring 10 rotational power from an engine/transmission assembly to an axle assembly.

In most land vehicles in use today, a drive train assembly is provided for transmitting rotational power from an output shaft of an engine/transmission assembly to an input shaft of an axle assembly so as to rotatably drive one or more wheels of the vehicle. To accomplish this, a typical vehicular drive train assembly includes a 15 hollow cylindrical driveshaft tube. A first universal joint is connected between the output shaft of the engine/transmission assembly and a first end of the driveshaft tube, while a second universal joint is connected between a second end of the driveshaft tube and the input shaft of the axle assembly. The universal joints provide a rotational driving connection from the output shaft of the engine/transmission assembly through 20 the driveshaft tube to the input shaft of the axle assembly, while accommodating a limited amount of angular misalignment between the rotational axes of these three shafts.

Ideally, the driveshaft tube would be formed in the shape of a cylinder that is absolutely round, absolutely straight, and has an absolutely uniform wall thickness. 25 Such a perfectly shaped driveshaft tube would be precisely balanced for rotation and, therefore, would not generate any undesirable noise or vibration during use. In actual practice, however, the driveshaft tubes usually contain variations in roundness, straightness, and wall thickness that result in minor imbalances when rotated at high speeds. To prevent such imbalances from generating undesirable noise or vibration, 30 therefore, it is commonplace to counteract such imbalances by securing balance

weights to selected portions of the driveshaft tube. The balance weights are sized and positioned to counterbalance the imbalances of the driveshaft tube such that it is balanced for rotation during use.

Traditionally, driveshaft tubes have been formed from steel or other metallic materials having relatively high melting temperatures. In such driveshaft tubes, welding has been commonly used to secure the balance weights thereto. More recently, however, driveshaft tubes have been formed from aluminum alloys and other metallic materials that are not well suited for welding, particularly in the high volume quantities usually associated with the vehicular manufacturing industry. Also, driveshaft tubes have recently been formed from composites and other materials that are not suited at all for welding.

To balance driveshaft tubes formed from these alternative materials, it has been proposed to use adhesive to secure the balance weights to the driveshaft tubes.

Although adhesives are known that provide sufficient strength and durability to retain the balance weights on the driveshaft tube in the rugged environment of a vehicular drive train assembly, the use of such adhesives has not gain widespread acceptance. One of the reasons for this lack of acceptance is that the curing time for such adhesives is relatively long. As a result, an undesirably long time delay is usually encountered between the initial point in time at which the balance weight is applied to the driveshaft and the subsequent point in time at which the adhesive has cured to allow the driveshaft and balance weight assembly to be re-tested to confirm the achievement of proper balance. This undesirably long time delay prevents the efficient manufacture of the driveshaft tubes in the high volume quantities usually associated with the vehicular manufacturing industry. Thus, it would be desirable to provide an improved method for rotatably balancing a driveshaft adapted for use in a vehicular drive train assembly for transferring rotational power from an engine/transmission assembly to an axle assembly.

## SUMMARY OF THE INVENTION

This invention relates to an improved method for rotatably balancing a driveshaft adapted for use in a vehicular drive train assembly for transferring rotational power from an engine/transmission assembly to an axle assembly. Initially, 5 a conventional balancing apparatus is used to determine the size and location of the balance weights needed to properly balance the driveshaft. The determined location on the driveshaft is then cleaned so as to remove any contaminants therefrom. Next, an adhesive material is applied to either or both of the driveshaft and the balance weight. The adhesive material may, for example, be a multi-cure adhesive material 10 including an adhesive portion and a curing activator portion. The balance weight is preferably formed having an inner surface that is curved to conform with the curvature of the outer surface of the driveshaft. The preferred balance weight is further formed having a serrated outer peripheral surface defined by a plurality of radially outwardly extending teeth and having a generally hat-shaped cross section including a relatively 15 thick central portion and a relatively thin outer rim portion. The overall size of the balance weight may be varied to provide differing amounts of weight for facilitating the balancing process. A sufficient quantity of adhesive material is provided between the driveshaft and the balance weight such that when the balance weight is pressed against the driveshaft, at least a portion of the adhesive material is extruded outwardly 20 into contact with at least a portion of the outer peripheral surface of the balance weight. The extruded portion of the adhesive material is then exposed to an accelerated curing process, such as ultraviolet radiation, heat, and the like, so as to cure at least that portion of the adhesive material to temporarily secure the balance weight to the driveshaft, thereby allowing the driveshaft to be immediately re-tested 25 on the balancing apparatus to confirm that proper rotational balance has been achieved. The uncured first portion of the adhesive material located between the driveshaft and the balance weight will later cure without the use of any accelerated curing process to permanently secure the balance weight to the driveshaft.

Various objects and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the preferred embodiment, when read in light of the accompanying drawings.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side elevational view of a vehicle drive train assembly having a plurality of balance weights secured thereto in accordance with the method of this invention.

10 Fig. 2 is a perspective view illustrating of a portion of the vehicle drive train assembly illustrated in Fig. 1 showing the initial steps in the method of securing a balance weight to a driveshaft tube in accordance with this invention.

15 Fig. 3 is a perspective view similar to Fig. 3 showing the subsequent steps in the method of securing the balance weight to the driveshaft tube in accordance with this invention.

Fig. 4 is an enlarged sectional elevational view of a portion of the driveshaft tube and the balance weight illustrated in Fig. 3 showing the adhesive material slightly enveloping the brim of the hat-shaped balancing weight.

20 Fig. 5 is a flow chart illustrating the steps in the method of securing the balance weight to the driveshaft tube in accordance with this invention.

25

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, there is illustrated in Fig. 1 a drive train assembly, indicated generally at 10, for a vehicle that is adapted to transmit rotational power from an engine/transmission assembly 11 to a plurality of driven wheels (not shown). The engine/transmission assembly 11 is conventional in the art and includes an externally splined output shaft (not shown) that is connected to a first slip yoke assembly, indicated generally at 12. The first slip yoke assembly 12 is conventional in the art and includes an internally splined tubular end portion 13 that slidably engages the externally splined output shaft of the engine/transmission assembly 11. As a result, the tubular end portion 13 of the first slip yoke assembly 12 is rotatably driven

by the output shaft of the engine/transmission assembly 11, but is free to move axially relative thereto to a limited extent. The first slip yoke assembly 12 further includes a yoke 14 that forms one part of a first universal joint assembly, indicated generally at 15. The first universal joint assembly 15 is also conventional in the art and includes a tube yoke 16 that is connected to the yoke 14 by a cross in a known manner. The tube yoke 16 is secured, such as by bonding or welding, to a first end of a first driveshaft section 17 for rotation therewith. The first universal joint assembly 15 thus provides a rotational driving connection between the output shaft of the engine/transmission assembly 11 and the first driveshaft section 17, while permitting a limited amount of axial misalignment therebetween. Alternatively, the output shaft of the engine/transmission assembly 11 may terminate in a conventional end yoke (not shown) which is directly connected to the cross of the first universal joint assembly 15.

The first driveshaft section 17 extends through and is supported for rotation by a center bearing assembly, indicated generally at 20. The center bearing assembly 20 is conventional in the art and includes a rigid frame or bracket 21 which is secured to a portion of a frame, chassis, or body 22 of the vehicle. The center bearing assembly 20 further includes an annular bearing (not shown) for rotatably supporting the first driveshaft section 17 therein. The first driveshaft section 17 terminates in a second end including a end yoke 23, which forms one part of a second universal joint assembly, indicated generally at 24. The second universal joint assembly 24 is also conventional in the art and includes a yoke shaft 25 which is connected to the end yoke 23 by a cross in a known manner. The yoke shaft 25 is, in turn, connected through a second slip yoke assembly, indicated generally at 28, to a first end of a second driveshaft section 27. The second universal joint assembly 24 thus provides a rotational driving connection between the first driveshaft section 17 and the second driveshaft section 27, while permitting a limited amount of axial misalignment therebetween. The structure and operation of the second slip yoke assembly 28 is conventional in the art and forms no part of this invention.

The second driveshaft section 27 terminates in a second end having a tube yoke 30 secured thereto. The tube yoke 30 forms one part of a third universal joint assembly 31. The third universal joint assembly 31 is also conventional in the art and includes a tube yoke 32 that is connected to an input shaft 33 of an axle assembly 34 by a cross in a conventional manner. The third universal joint assembly 31 thus provides a rotational driving connection between the second driveshaft section 27 and the input shaft 33 of the axle assembly 34, while permitting a limited amount of axial misalignment therebetween. The axle assembly 34 is conventional in the art and is adapted to transmit rotational power from the input shaft 33 to the driven wheels of the vehicle in a known manner.

As is well known in the art, most driveshaft tubes, such as the driveshaft sections 17 and 27, usually contain variations in roundness, straightness, and wall thickness that result in minor imbalances when rotated at high speeds. To prevent such imbalances from generating undesirable noise or vibration, therefore, it is commonplace to counteract such imbalances by securing balance weights to selected portions of the driveshaft tube. Thus, as shown in Fig. 1, a first balance weight 40 is secured to the outer surface of the first driveshaft section 17. Similarly, a second balance weight 41 is secured to the outer surface of the second driveshaft section 27. The first and second balance weights 41 and 42 are sized and positioned to counterbalance the imbalances of the driveshaft sections 17 and 27 such that the drive train assembly 10 is balanced for rotation during use.

A conventional balancing apparatus (not shown) can be used to determine the size and location of the balance weights needed to properly balance the driveshaft sections 17 and 27 for rotation. Thus, for example, the driveshaft section 17 is initially placed in the balancing apparatus so that an appropriate size and location for applying the balancing weight 40 is determined. The determined location on the driveshaft section 17 is then cleaned so as to remove any contaminants therefrom, such as a layer of aluminum oxide that typically forms on the outer surface of aluminum alloy materials. Next, an adhesive material is applied to either or both of the driveshaft section 17 and the balance weight 40. Preferably, the adhesive material

is a multi-cure, two-part material including an activator part 42 and an adhesive part 43, such as a 6000 Series adhesive material manufactured by Dymax Corporation. The term “multi-cure adhesive” is intended to refer to an adhesive material that can be cured by more than one curing process. However, this invention contemplates that 5 any type of adhesive material may be used to secure the balance weight 40 to the outer surface of the driveshaft section 17.

Although the balance weight 40 may have any desired structure, including those structures that are currently known in the art, the preferred structure of the balance weight 40 is illustrated in Figs. 2, 3, and 4. As shown therein, the balance 10 weight 40 includes an inner surface 44 that is preferably curved to conform with the curvature of the outer surface of the driveshaft section 17, although such is not required. The preferred balance weight 40 is further formed having a serrated outer peripheral surface defined by a plurality of radially outwardly extending teeth 46. Additionally, the balance weight 40 may be formed having a generally hat-shaped 15 cross section including a relatively thick central portion 50 and a relatively thin outer rim portion 51. In this structure, the teeth 46 of the serrated outer peripheral surface are formed in the relatively thin outer rim portion 51 of the balance weight 40. The purpose for the teeth 46 and the relatively thin outer rim portion 51 will be explained below. The overall size of the balance weight 40 may be varied to provide differing 20 amounts of weight for facilitating the balancing process and for stress control in the adhesive material. If desired, a central aperture 50a may be formed through the central portion 50 of the balance weight 40 for a purpose that will be described below.

As shown in Fig. 2, the adhesive material is applied to either or both of the outer surface of the driveshaft section 17 and the inner surface 44 of the balance 25 weight 40. For the illustrated two-part adhesive material, the activator part 42 of the adhesive material can be applied to the outer surface of the driveshaft section 17, while the adhesive part 43 can be applied to the inner surface 44 of the balance weight 40 (or vice versa). In any event, a sufficient quantity of adhesive material is provided between the driveshaft section 17 and the balance weight 40 such that when the 30 balance weight 40 is pressed against the driveshaft section 17, a first portion 45a (see

Figs. 3 and 4) of the adhesive material is extruded outwardly from between the driveshaft section 17 and the balance weight 40. This first extruded portion 45a (often referred to as “squeeze-out”) of the adhesive material is moved into contact with at least a portion of the outer peripheral surface of the balance weight 40. Thus, for the 5 illustrated structure of the balance weight 40, the first extruded portion 45a of the adhesive material extends over and encapsulates the teeth 46 of the relatively thin rim portion 51 of the balance weight 40. The teeth 46 of the relatively thin rim portion 51 thus facilitate a relatively large surface area of engagement and encapsulation between the first extruded portion 45a of the adhesive material and the outer peripheral surface 10 of the balance weight 40. Similarly, a second portion 45b of the (see Figs. 3 and 4) of the adhesive material is extruded outwardly through the aperture 50a formed through the central portion 50 of the balance weight 40. This second extruded portion 45b of the adhesive material extends over and into contact with at least a portion of the upper 15 surface of the balance weight 40.

15 Thus, as best shown in Fig. 4, when the balance weight 40 is pressed against the driveshaft section 17, some of the adhesive material remains between the inner surface 44 of the balance weight 40 and the outer surface of the driveshaft section 17. At the same time, however, a first portion 45a of the adhesive material is extruded outwardly to extend between the outer peripheral surface of the balance weight 40 and the driveshaft section 17, while a second portion 45b of the adhesive material is 20 extruded upwardly through the aperture 50a to extend partially over the outer surface of the balance weight 40. The first and second extruded portions 45a and 45b of the adhesive material are then exposed to an accelerated curing process so as to cure at least those portions 45a and 45b of the adhesive material to temporarily secure the 25 balance weight 40 to the driveshaft section 17. For example, the extruded portions 45a and 45b of the adhesive material 40 may be exposed to ultraviolet radiation 47, as shown in Fig. 4, for a relatively short period of time (five to ten seconds) to effect the rapid curing thereof. Ultraviolet radiation is a preferred accelerated curing process because it does not cause undesirable localized heating of the driveshaft section 17. 30 However, any other accelerated curing process, such as heat, chemicals, and the like,

may be used to effect the rapid curing of the extruded portions 45a and 45b of the balance weight 40.

The result of this accelerated curing process is that the first and second extruded portions 45a and 45b of the adhesive material are sufficiently cured to 5 temporarily secure the balance weight 40 to the first driveshaft section 17. The first extruded portion 45a of the adhesive material is cured to bond the teeth 46 of the relatively thin rim portion 51 of the balance weight 40 to the outer surface of the first driveshaft section 17. The second extruded portion 45b of the adhesive material is cured to bond the interior portions thereof (located within the aperture 50a) and the 10 outer surface of the balance weight 40 to the outer surface of the first driveshaft section 17. Also, the second extruded portion 45b of the adhesive material extending over the outer surface of the balance weight 40 is hardened so as to mechanically retain the balance weight 40 to the outer surface of the first driveshaft section 17 in the 15 nature of a rivet.

Consequently, the balance weight 40 is sufficiently secured to the driveshaft section 17 to permit the driveshaft section 17 to be immediately re-tested on the balancing apparatus to confirm that proper rotational balance has been achieved. If the proper rotational balance has been achieved, the driveshaft section 17 is removed from the balancing apparatus for subsequently installation in a vehicle. Inasmuch as a 20 relatively long period of time usually passes between the conclusion of the balancing process and installation on the vehicle, the uncured portion of the adhesive material (located between the driveshaft section 17 and the balance weight 40) will have sufficient time to cure without the use of any accelerated curing process. Thus, by the time the driveshaft section 17 is installed on the vehicle, the entire amount of the 25 adhesive material will be cured, and the balance weight 40 will be permanently secured to the driveshaft section 17. If re-testing of the driveshaft section 17 indicates that further balancing is required, additional balance weights can be secured to the driveshaft section 17 in the same manner as described above.

Although this invention has been described and illustrated in the context of a 30 vehicular drive train assembly 10 having multiple driveshaft sections 17 and 27, it will

be appreciated that this invention may be practiced in a vehicular drive train assembly having only a single driveshaft tube. It will be further appreciated that this invention is not limited to vehicular driveshaft tube applications, but rather may be practiced on any type of driveshaft structure for transferring rotational power from a source of 5 rotational power to a rotatably driven device. Lastly, it should be understood that both of the first and second extruded portions 45a and 45b of the adhesive material need not be simultaneously provided. Rather, either the first extruded portion 45a or the second extruded portion 45b may be provided individually to sufficiently secure the balance weight 40 to the driveshaft section 17 to confirm that proper rotational 10 balance has been achieved.

In accordance with the provisions of the patent statutes, the principle and mode of operation of this invention have been explained and illustrated in its preferred embodiment. However, it must be understood that this invention may be practiced otherwise than as specifically explained and illustrated without departing from its 15 spirit or scope.

What is claimed is:

1. A method for attaching two articles together comprising the steps of:
  - (a) providing a first article;
  - (b) providing a second article having a surface;
  - 5 (c) providing an adhesive material between the first and second articles;
  - (d) moving the first and second articles toward one another such that a first portion of the adhesive material is disposed between the first and second articles and a second portion of the adhesive material extends between the first article and the surface of the second article; and
- 10 (e) exposing the second portion of the adhesive material to an accelerated curing process to cure the second portion of the adhesive material prior to curing the first portion of the adhesive material.

2. The method defined in Claim 1 wherein the first article is a driveshaft and the second article is a balance weight.
- 15

3. The method defined in Claim 1 wherein the surface of the second article is a peripheral surface.

- 20 4. The method defined in Claim 3 wherein the peripheral surface of the second article is formed having a serrated outer peripheral surface, and wherein the second portion of the adhesive material extends between the first article and the serrated outer peripheral surface of the second article.

- 25 5. The method defined in Claim 1 wherein the surface of the second article is formed having a relatively thin rim portion, and wherein the second portion of the adhesive material extends between the first article and the relatively thin rim portion of the second article.

6. The method defined in Claim 1 wherein the outer peripheral surface of the second article is formed having a relatively thin rim portion and a serrated outer peripheral surface, and wherein the second portion of the adhesive material extends between the first article and the serrated outer peripheral surface of the relatively thin rim portion of the second article.

7. The method defined in Claim 1 wherein the first article has an outer surface defining a shape, and wherein the second article has an inner surface defining a shape that corresponds to the outer surface of the first article.

10

8. The method defined in Claim 1 wherein the first and second articles are pressed against one another such that a first portion of the adhesive material is disposed between the first and second articles and a second portion of the adhesive material is extruded outwardly from between the first and second articles such that the second portion of the adhesive material extends between the first article and the peripheral surface of the second article

15

9. The method defined in Claim 1 wherein the accelerated curing process is ultraviolet radiation.

20

10. The method defined in Claim 1 wherein the accelerated curing process is heat.

25

11. The method defined in Claim 1 wherein the adhesive material includes an activator part that is applied to one of the first and second articles and an adhesive part that is applied to the other of the first and second articles.

30

12. The method defined in Claim 1 wherein the first article has an outer surface, the second article has an inner surface disposed adjacent to the outer surface of the first article, the second article has an outer surface opposite the inner surface,

and the second portion of the adhesive material extends between the first article and the outer surface of the second article.

13. The method defined in Claim 1 wherein the second article has an  
5 aperture formed therethrough from an inner surface disposed adjacent to the first article to an outer surface, and the second portion of the adhesive material extends through the aperture and over a portion of the outer surface of the second article.

## ABSTRACT OF THE DISCLOSURE

A method for rotatably balancing a driveshaft includes the initial step of using a conventional balancing apparatus is used to determined the size and location of the balance weights needed to properly balance the driveshaft. Next, an adhesive material 5 is applied to either or both of the driveshaft and the balance weight. The balance weight is preferably formed having an inner surface that is curved to conform with the curvature of the outer surface of the driveshaft. The preferred balance weight is further formed having a relatively thin outer peripheral rim portion having a plurality 10 of radially outwardly extending teeth formed thereon. The overall size of the balance weight may be varied to provide differing amounts of weight for facilitating the balancing process. A sufficient quantity of adhesive material is provided between the driveshaft and the balance weight such that when the balance weight is pressed against the driveshaft, at least a portion of the adhesive material is extruded outwardly into contact with at least a portion of the outer peripheral surface of the balance weight. 15 The extruded portion of the adhesive material is then exposed to an accelerated curing process, such as ultraviolet radiation, heat, and the like, so as to cure at least that portion of the adhesive material to temporarily secure the balance weight to the driveshaft, thereby allowing the driveshaft to be immediately re-tested on the balancing apparatus to confirm that proper rotational balance has been achieved. The 20 uncured first portion of the adhesive material located between the driveshaft and the balance weight 40 will later cure without the use of any accelerated curing process to permanently secure the balance weight to the driveshaft.

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR BALANCING A VEHICLE DRIVESHAFT

the specification of which is attached hereto unless the following box is checked:

was filed on \_\_\_\_\_ as U.S. Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)	(Filing Date)	(status - patented, pending, abandoned)
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith with full power of substitution and revocation: Richard S. MacMillan, Reg. No. 30,085; Mark J. Sobanski, Reg. No. 29,700; Oliver E. Todd, Jr., Reg. No. 24,746; Ted C. Gillespie, Reg. No. 27,981; Donald R. Fraser, Reg. No. 17,919; William J. Clemens, Reg. No. 26,855; A. Michael Tucker, Reg. No. 32,539; Gary M. Sutter, Reg. No. 31,574; John B. Molnar, Reg. No. 31,914; Douglas V. Pavelko, Reg. No. 36,888; Allen W. Inks, Reg. No. 37,358; Thedford I. Hitaffer, Reg. No. 38,490; Scott A. Blake, Reg. No. 40,515; Robert M. Leonardi, Reg. No. 27,815; and Frank B. McDonald, Reg. No. 28,738.

Address all telephone calls to Richard S. MacMillan at (419) 255-5900.

Address all correspondence to MacMillan, Sobanski & Todd, LLC, One Maritime Plaza, Fourth Floor, 720 Water Street, Toledo, Ohio 43604.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Gerald L. Myers

Inventor's signature Gerald L. Myers Date: 12/18/97

Residence: 6645 Santo Lane, Maumee, Ohio 43537

Citizenship: U.S.A. Post Office Address: Same

Full name of second inventor: \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_ Post Office Address: \_\_\_\_\_

Full name of third inventor: \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: \_\_\_\_\_


Citizenship: \_\_\_\_\_ Post Office Address: \_\_\_\_\_

Full name of fourth inventor: \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_ Post Office Address: \_\_\_\_\_

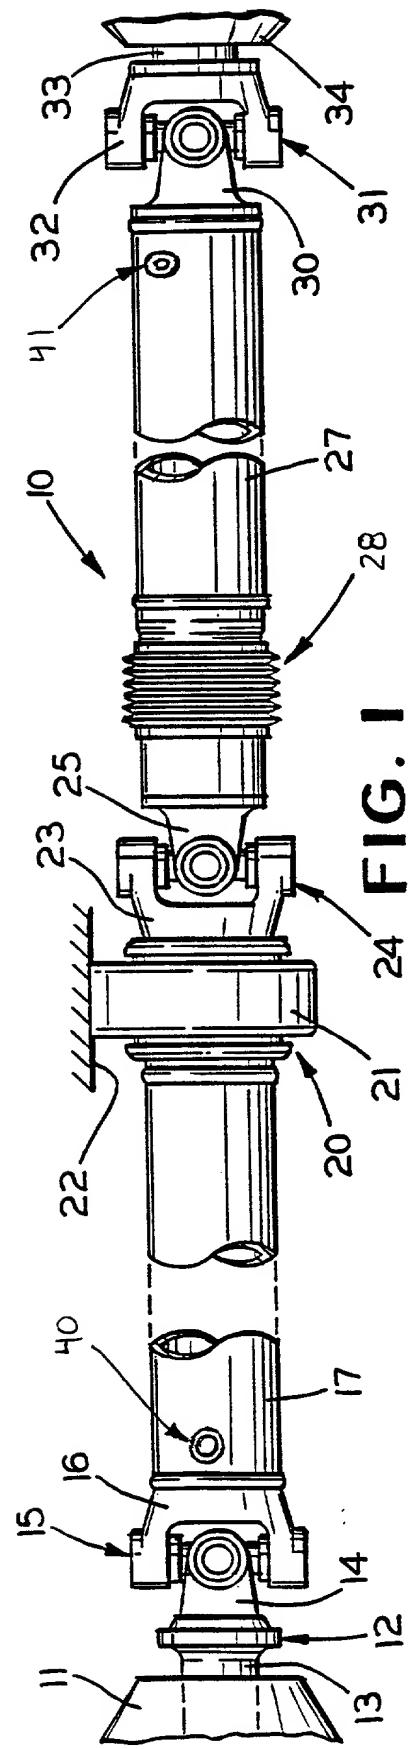

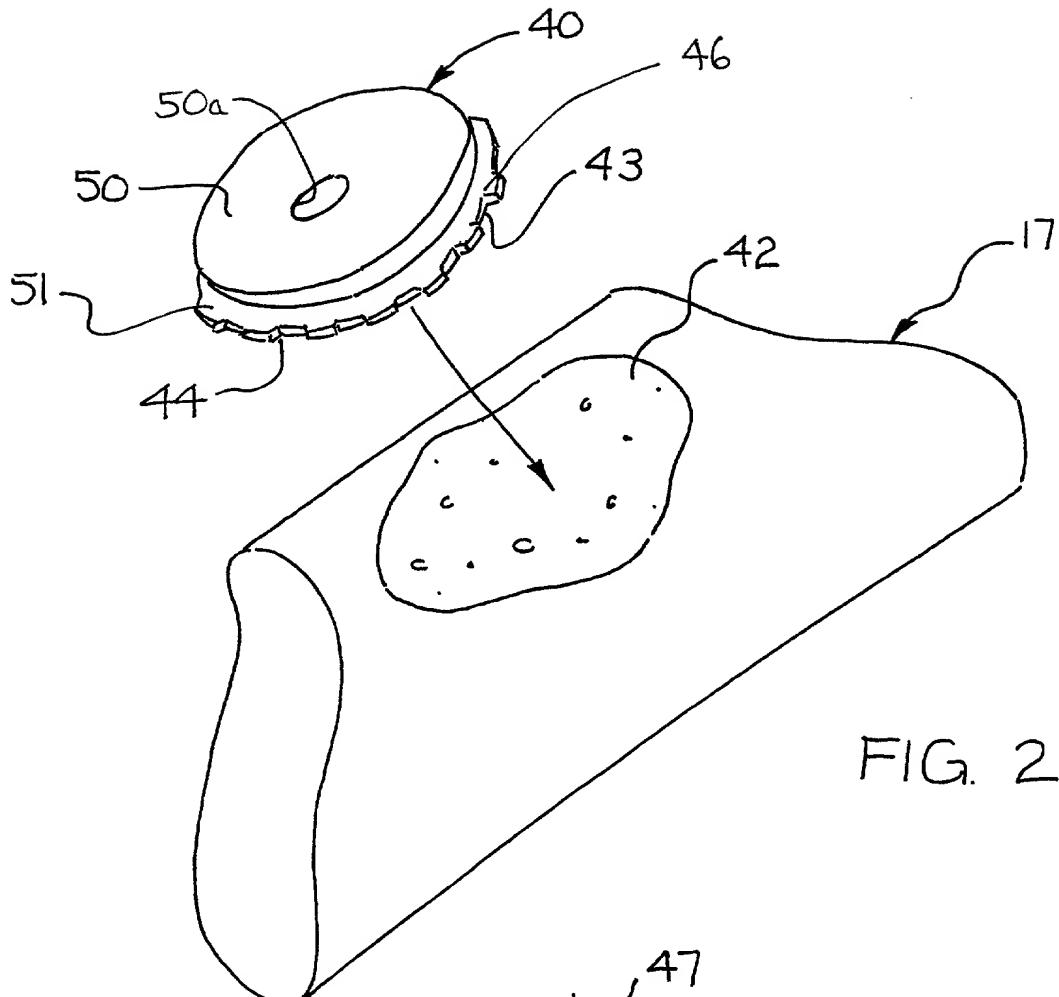


FIG. 2

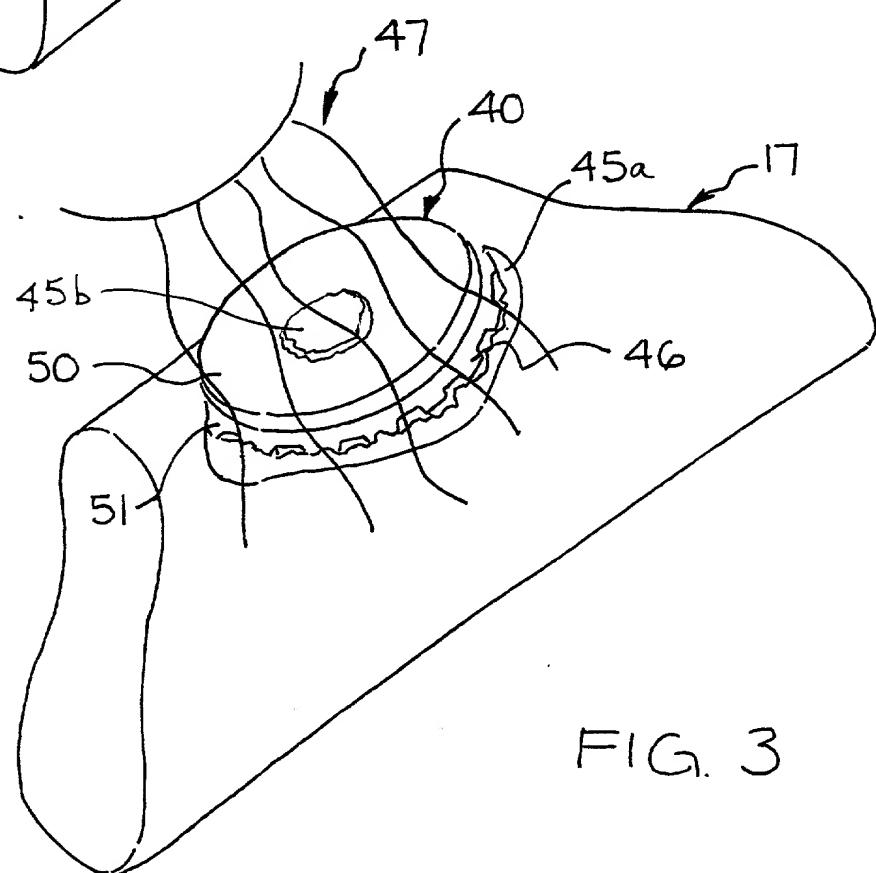


FIG. 3

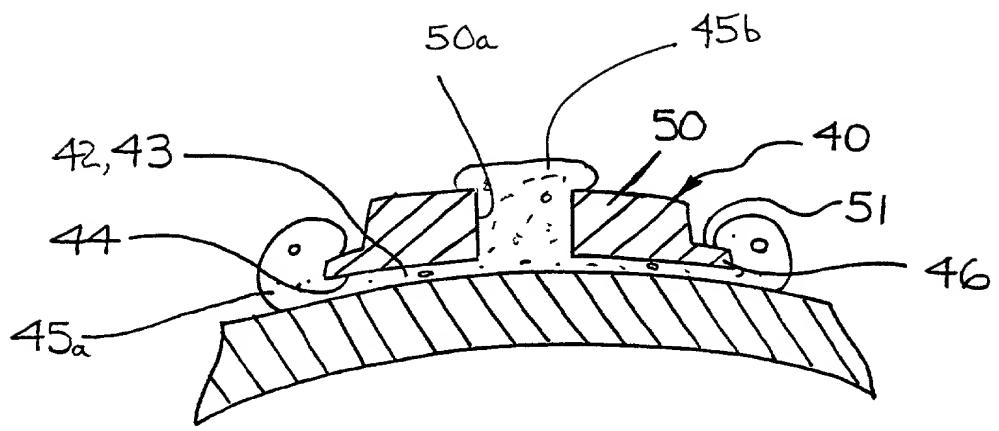


FIG. 4

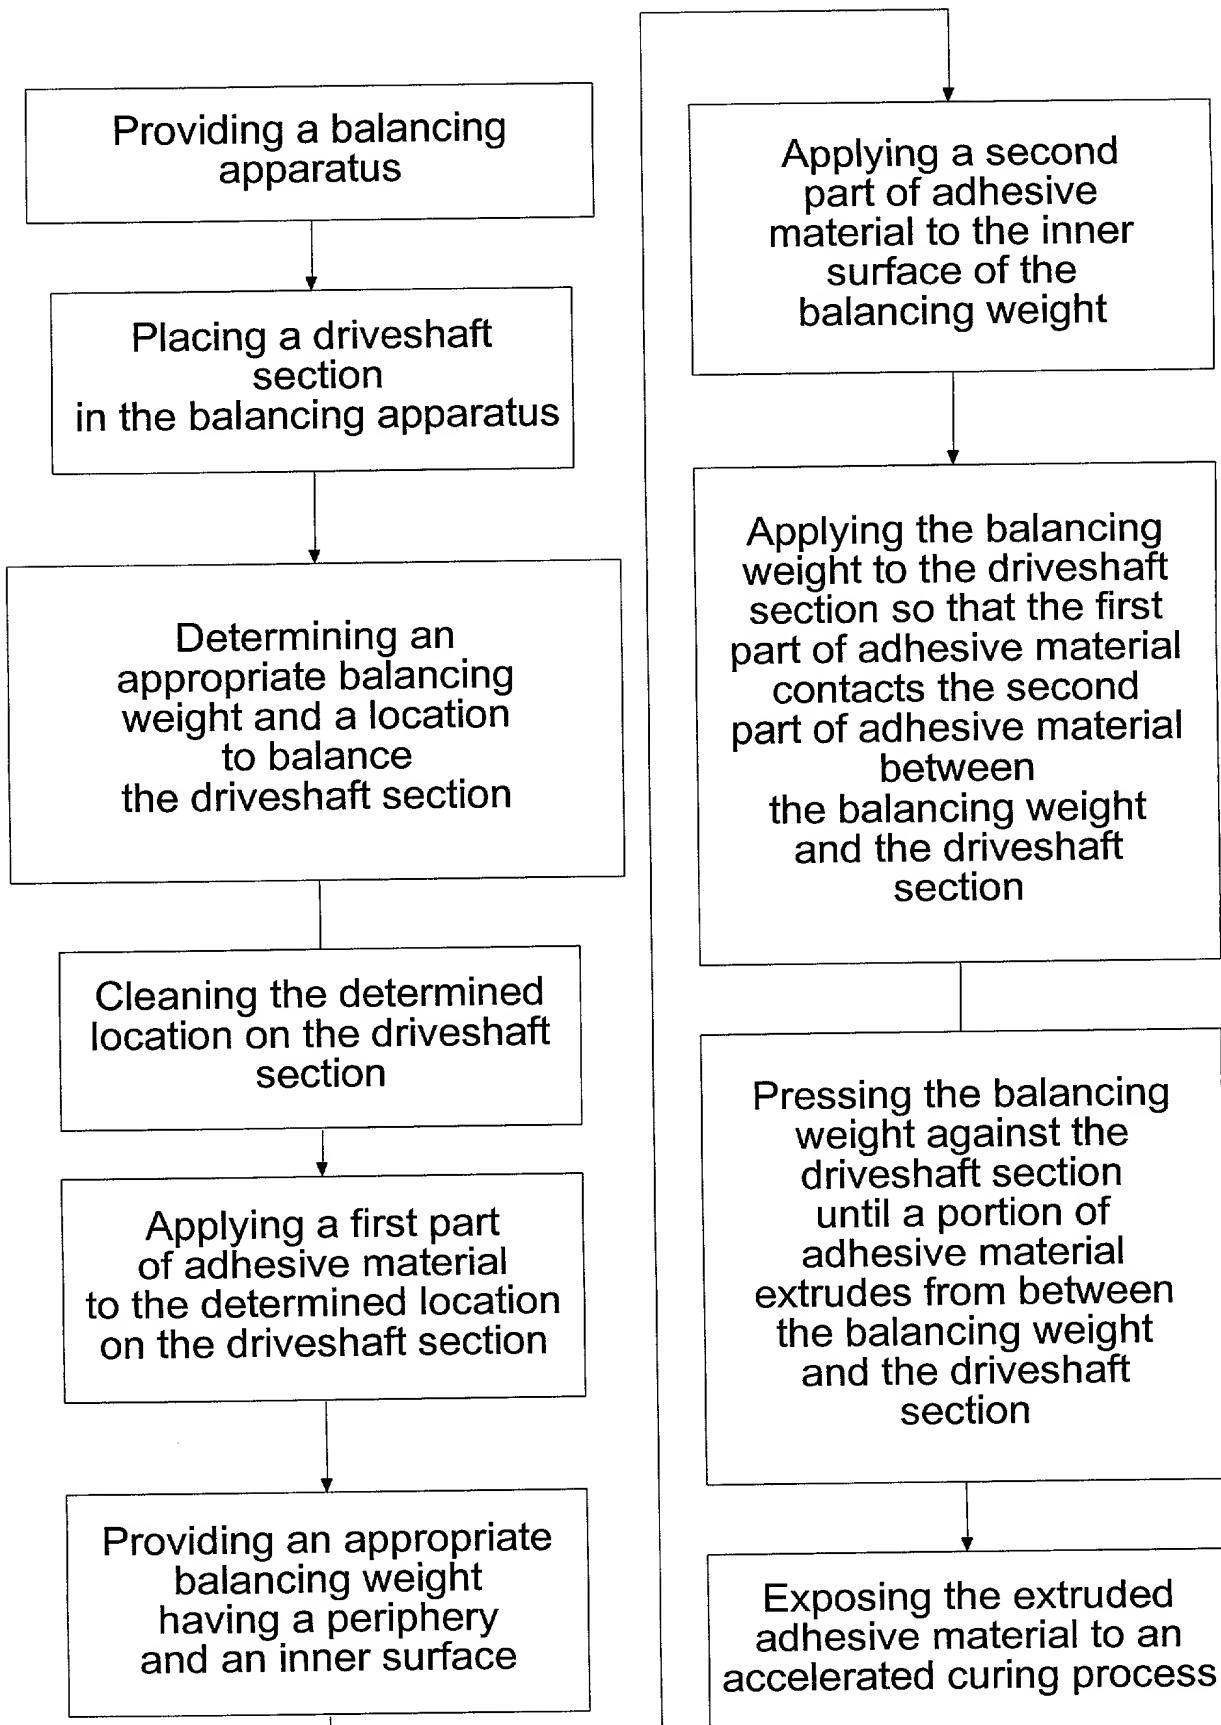


Fig. 5